


**PLAN VIEW**

1/4" = 1'-0"

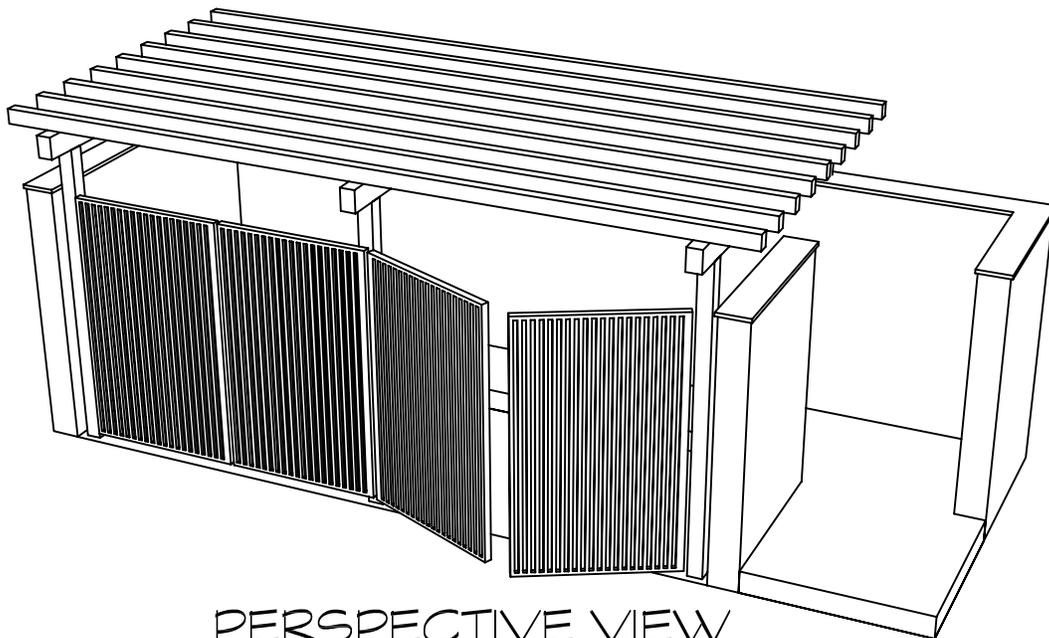

**PERSPECTIVE VIEW**

NO SCALE


C:\drawings\Building\Standards\Trash Enclosure.dwg [Layout1 (2)] May, 01, 2008 - 4:13pm Klockwood

City of Cathedral City  
68-700 Avenida Lalo Guerrero  
Cathedral City, Ca. 92234  
Ph. (760) 770-0340

**TRASH ENCLOSURE  
STANDARD**

**BUILDING DEPARTMENT**

Scale:	AS SHOWN
Date:	MAY 2008
Sheet:	1 of 2 Sheets
Drawn By:	KSL
Checked By:	DP/RM

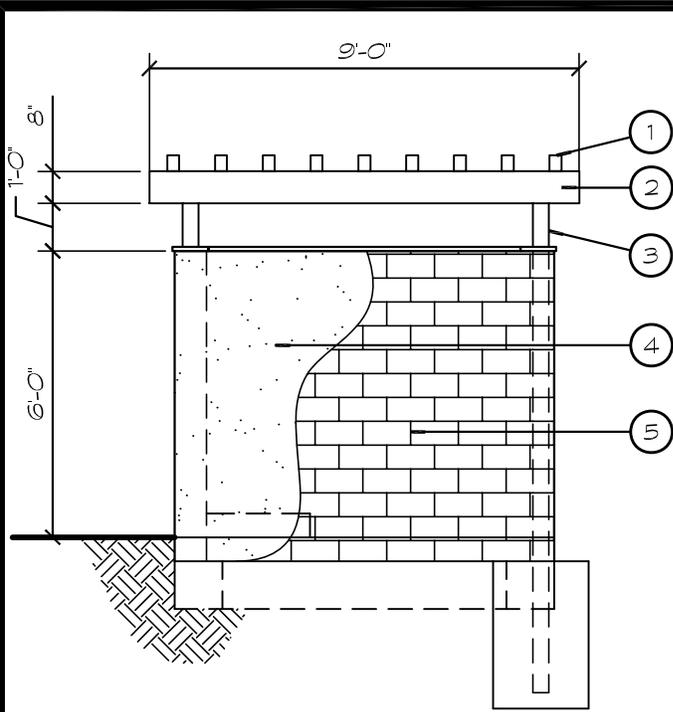


## SIDE ELEVATION

1/4" = 1'-0"

### NOTES:

1. 3x4 @ 12" OC TRELLIS.
2. 4x6 BEAM.
3. 4x4 SUPPORT COLUMNS;  
SET IN 24"Ø x 3' DEEP FOOTING.
4. SKIM COAT STUCCO.
5. 8x8x16 CONCRETE BLOCK, #4 REBAR  
VERT. @ 24" OC CENTERED. #4 REBAR  
HORIZ. BOND BEAM @ 24" OC; SOLID  
GROUTED;  
DECORATIVE BLOCK CAP.
6. 6" CONCRETE SLAB W/ #3 REBAR @  
18" OC EACH WAY OVER 90%  
COMPACTED BASE, 4% MAX SLOPE TO  
DRAIN.
7. 6" CONCRETE CURB (WHEEL STOP),  
TYP. AT INSIDE PERIMETER.
8. SLIDE BOLT PER CITY STANDARDS.
9. CANE BOLT PER CITY STANDARDS.
10. 2x3 TS GATE FRAME, MITER CUT &  
WELD CORNERS. GRIND ALL CORNERS  
SMOOTH; 1-1/2" x 3/8 BAR STOP WELDED  
FLUSH WITH INSIDE FACE OF FRAME

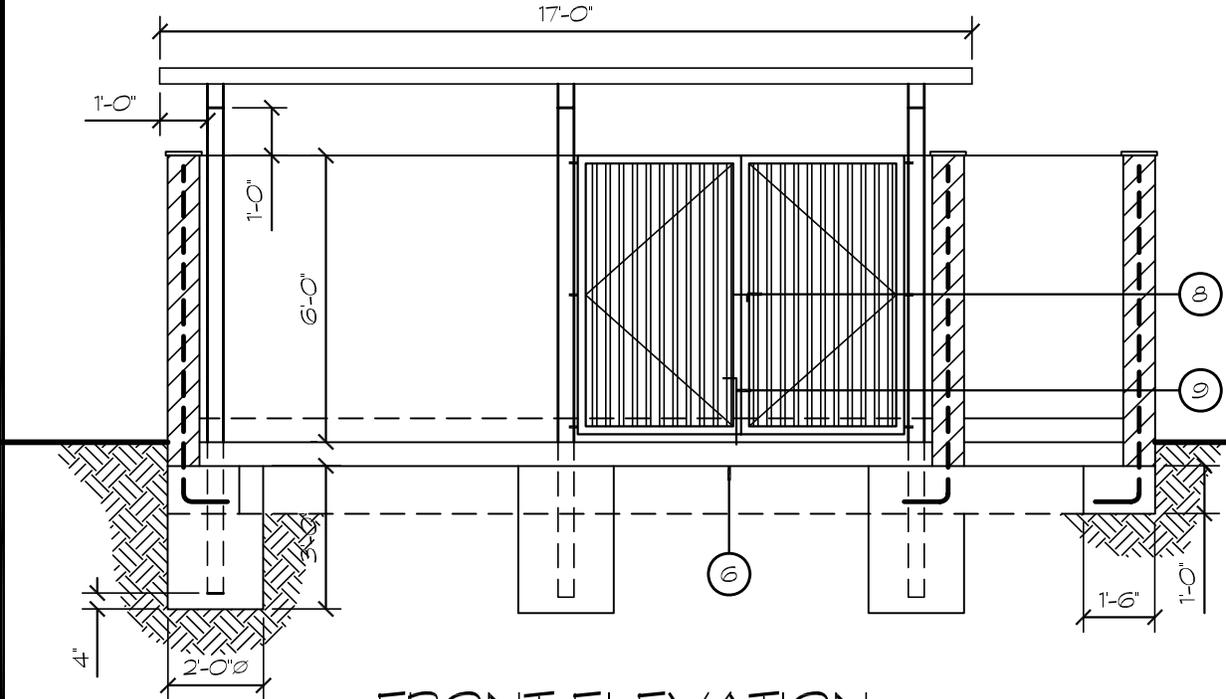

## FRONT ELEVATION

1/4" = 1'-0"

C:\drawings\Building\Standards\Trash Enclosure.dwg [Layout 2 (2)] May 01, 2008 - 4:13pm klockwood



City of Cathedral City  
68-700 Avenida Lalo Guerrero  
Cathedral City, Ca. 92234  
Ph. (760) 770-0340

## TRASH ENCLOSURE STANDARD

### BUILDING DEPARTMENT

Scale: AS SHOWN

Date: MAY 2008

Sheet: 2 of 2 Sheets

Drawn By: KSL  
Checked By: DP/RM