
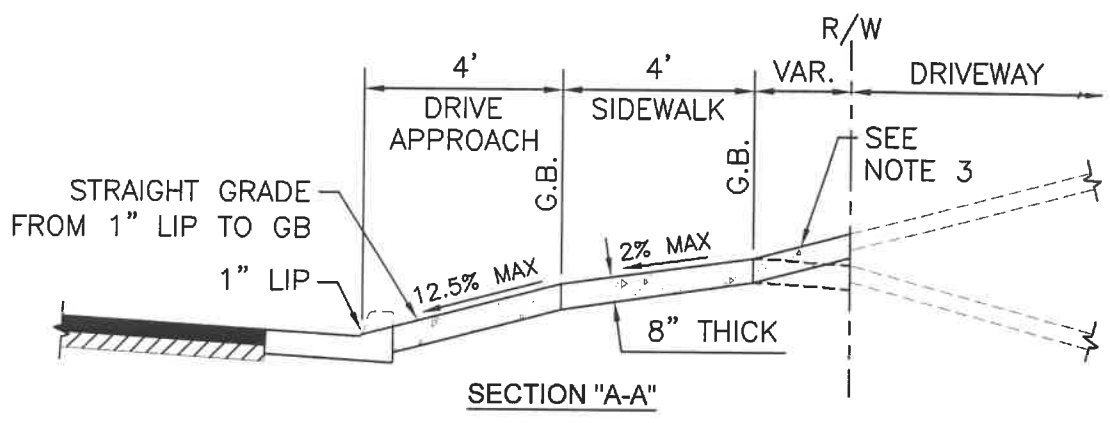


J:\Drawings\Engineering\Standards\CC-207 Driveway & Sidewalk Detail.dwg [Plan] November 15, 2017 - 2:59pm erodriguez

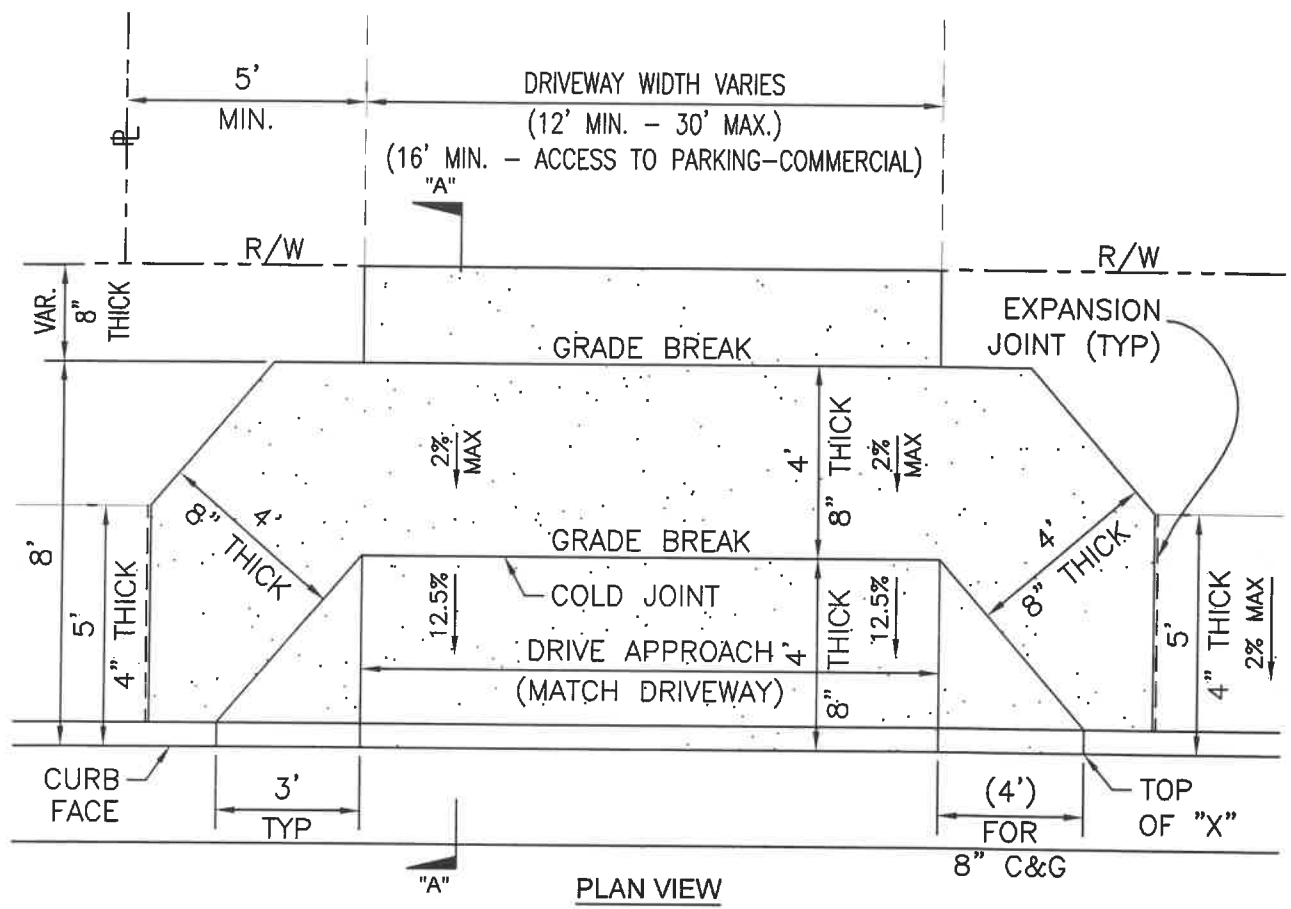

- NOTES:
1. ALL CONSTRUCTION SHALL BE MINIMUM OF CLASS "B" CONCRETE. (560-C-3250)
  2. 20' OF FULL-HEIGHT CURB FACE REQUIRED BETWEEN DRIVEWAYS WITHIN ANY ONE PROPERTY FRONTAGE.
  3. CONSTRUCT THE CONNECTING PROFILE GRADE OF THE PRIVATE ON-SITE DRIVEWAY SO THAT IT PROVIDES SMOOTH VEHICLE ACCESS OVER THE DRIVE APPROACH.

NOVEMBER 2017	<b>Cathedral City</b> City of Cathedral City Engineering Department 68700 Avenida Lolo Guerrero Cathedral City, Ca. 92234 Ph. (760) 770-0349	<h2 style="margin: 0;">DRIVEWAY APPROACH</h2> <p style="margin: 0;">MODIFIED COMMERCIAL WITH SIDEWALK DETAIL</p>	1	
SIGNATURE ON FILE		CITY ENGINEER	CITY OF CATHEDRAL CITY	OF 1
CITY ENGINEER			SECTION 200-B	